

Specifications


ROE
CREATIVE DISPLAY

Module	LINX9	LINX12	LINX18	LINX25
Pixel Pitch	9.375mm	12.5mm	18.75mm	25mm
Max. Brightness Calibrated	3,500nits 4,400nits(HB)	3,500nits 4,400nits(HB)	3,500nits*2 4,400nits(HB)	2,500nits*2 3,000nits(HB)
Panel Dimension	300 x 1200 x 52mm 11.8" x 47.24" x 2.05"	300 x 1200 x 52mm 11.8" x 47.24" x 2.05"	300 x 1200 x 52mm 11.8" x 47.24" x 2.05"	300 x 1200 x 52mm 11.8" x 47.24" x 2.05"
Panel Resolution (H x V)	32 x 128	24 x 96	16 x 64	12x 48
Weight per panel	4.8kg; 10.58lbs	4.7kg; 10.36lbs	3.6kg; 7.94lbs	2.4kg; 5.29lbs
Power Consumption Max/Average	160W / 80W	160W / 80W	160W / 80W	160W / 80W
BTU Max/Average	546 / 251	546 / 251	546 / 251	409 / 188
Transparency	18%	27%	38%	52%
Max. Curving degree	360 degree	360 degree	360 degree	360 degree
Max. Hanging (panels) *1	15	15	15	15
LED Configuration	SMD 3535 White	SMD 3535 White	SMD 3535 White	SMD 3535 White
Viewing Angle Vertical	120°	120°	120°	120°
Viewing Angle Horizontal	140°	140°	140°	140°
Multiplexing	4	3	Static	Static
Refresh Rate	3840Hz	3840Hz	3840Hz	3840Hz
Gray Scale	16bit	16bit	16bit	16bit
Frame Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Operational Temp / Humidity	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH
Storage Temp / Humidity	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH
IP Rating (front/rear)	Outdoor	Outdoor	Outdoor	Outdoor
Certifications	ETL,TUV	CE, ETL	ETL,TUV	CE, ETL

*Notes: The Specifications are for reference, actual values may vary.

1. The max. hanging amount is only valid when the ROE Visual hanging bar and complementary accessories are used and in an indoor situation, safety factor is 5. No climbing is allowed.
2. Optional available in HB on request

Dimensions

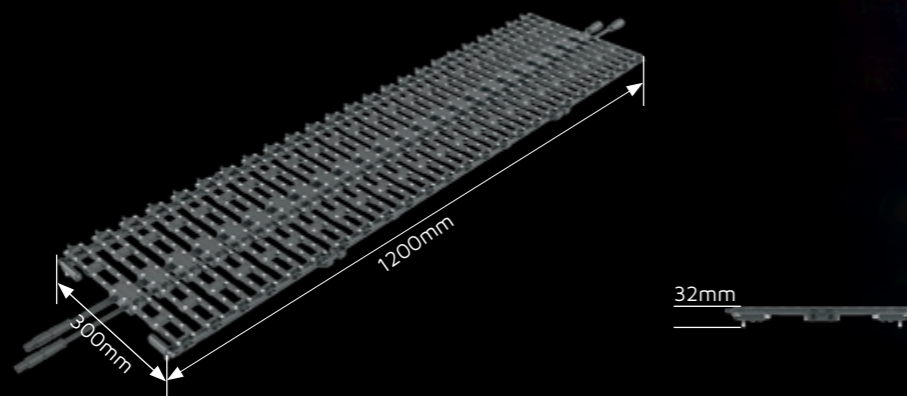

www.roevisual.com

ROE Visual Co., Ltd. | ROE Visual US, Inc. | ROE Visual Europe BV
roe@roevisual.com | usa@roevisual.com | europe@roevisual.com



Linx 25 Fold

FLEXIBILITY MAKING MODELLING

OUTDOOR LED CURTAIN

“ Semi-Transparent ”

The stunning, lightweight Linx offers up to 52% transparency with an ability to easily create see-through or peek-a-boo effects.

Ultra-flexible

Flexibility allow LED designers achieve creative platform with which to create arches, waves, a straight wall with an end flip and other interesting configurations.

Ultra-Thin

Linx tiles are offered with a minimum thickness of 32mm.

Precise and easy install, suitable for storage.

Dimension of screen: 3,600mm x 15,900mm(W x H)

